

PRODUCT DATASHEET

High brightness, Flicker free, IP65 - High Bay
HYD-708-200W 6000K



Application

- Warehouse
- Exhibition Hall
- Industrial Plants
- Parking lot
- Gymnasiums

Benefits

- Flicker free
- Protection against water & dust, IP65
- Integrated design, dust and insect protection
- High energy saving, up to 60% Comparing to conventional Light

Features



- Clear PC Lenses
- Warranty 5 years
- Easy and quick installation
- Die-cast aluminum body for better heat dissipation, anti-corrosion, and easy maintain

Electrical Data

Nominal wattage (W)	200W
Nominal Voltage (V)	220-240V
Mains Frequency (Hz)	50
Nominal Current (mA)	42
Power Factor λ	0.9
Operating mode	DOB

Photometrical data


Luminous flux $\pm 10\%$ (lm)	19432
Luminous efficacy	92 lm/w
Color temperature	6000K
Light color (designation)	Cold White
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 5 SDCM
Luminous intensity/cd	9012
Flickering	Flicker free
Beam angle	96 °

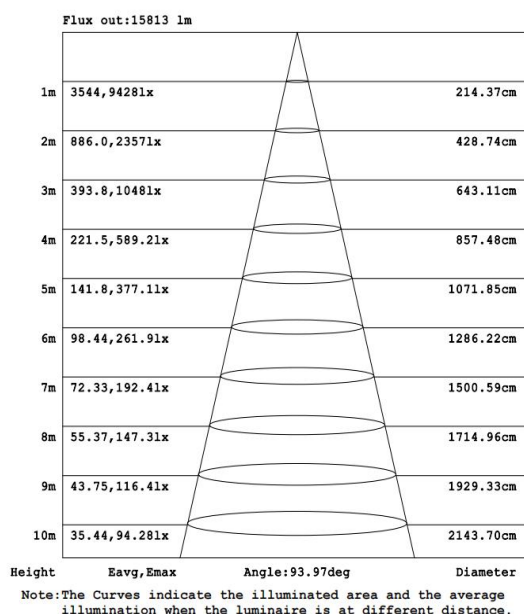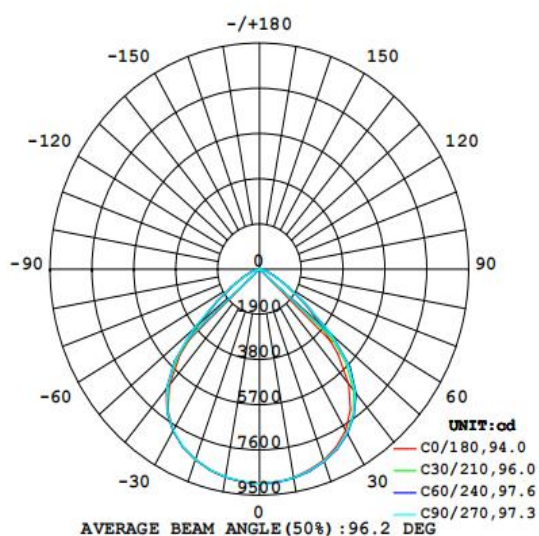

6000K

Dimensions & Weight

Diameter (mm)	330
Height (mm)	32
Product weight (g)	1486

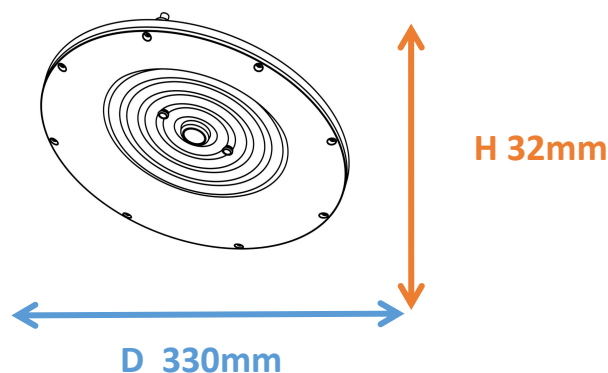

Material & Colors

Product color	Gray+White
Housing color	Gray+White
Body material	Aluminum
Cover material	PC
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-40°C - +90 °C
Temperature range at storage	-40°C - +80 °C
Type of connection	Screwless terminal
Type of protection	IP65
Dimmable	No
Mounting type	Surface mounted
Mounting location	Ceiling
Application environment	Indoor/Outdoor
Cut size (mm)	No
LED module replaceable	Not replaceable
With light source	Yes


Certificates & Lifespan

Life (h)	50,000
Certificates	CB CE LVD EMC
Standards	ISO9001:2015

Logistical Data

Product code	Dimensions (L*W*H)	Pcs/ carton	G.W. kg	Volume CBM
HYD-708-200W

Installation Method

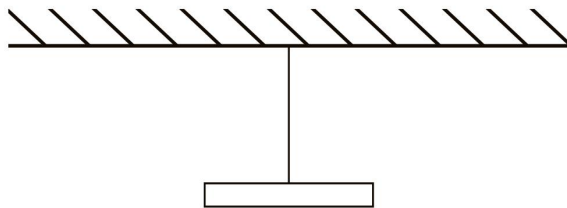

Suspension

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.